



MAYTAG® COMMERCIAL TOP-LOAD WASHER

LAUNDRY **SOLUTIONS**
YOU CAN **DEPEND** ON.

THE LONGEST-LASTING TOP-LOAD WASHER

Maytag® top-load washers last longer than other leading brands, thanks to a simple design that reduces wear. It's another way you can depend on Maytag to maximize your equipment investment.

MICROPROCESSOR CONTROLS

Maytag® Computer Trac® controls let you adjust prices by cycle, day and time and provide simple one-touch cycle selection.



FOR YOUR RESIDENTS:

- One-Touch Cycle Selection
- Vacuum Fluorescent Display Panel
- Extra-Large Lid And Tub Opening
- Canadian Model Features Dual Coin-Drop Operation

FOR YOUR FACILITY:

- Easy-To-Program Computer Trac® Controls
- Self-Diagnostics Reduce Service Costs
- Front Access For Faster Service
- Optional Audit System With Two-Way Data Communication

BUILT-TO-LAST™ FEATURES:

- Dependable Drive® Orbital Transmission
- Poly-Pump™ Polypropylene Pump Can't Rust
- Premium Porcelain-Enamel Top
- Quad Coat™ Cabinet Protection
- Heavy-Duty Leveling Legs


MAT12PD



**LASTS LONGER
THAN OTHER
LEADING BRANDS.**

Maytag® Top-Load Washer

MICROPROCESSOR COIN-DROP

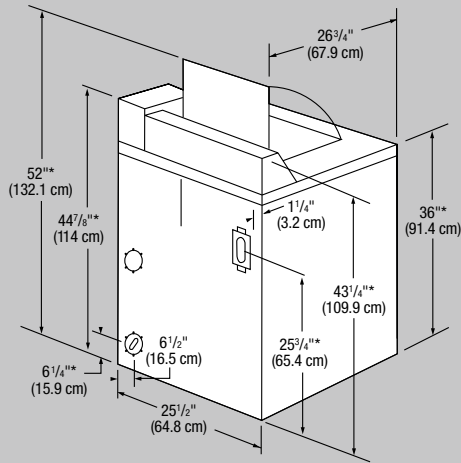

* Dimensions will vary according to adjustment of leveling legs; add 1/2" (1.3 cm) minimum.

OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



	Top-Load Washer
WASHER SPECIFICATIONS	
MODEL	MAT12PD
MOTOR	
Single-phase, reversible, thermoprotected	•
HP (kw)	1/2 (.37)
APPROXIMATE WATER USAGE — gal. (liters)	
Factory preset hot cycle average, hot water	6 1/2 (24.6)
Factory preset average, overall	31 1/2 (119.2)*
Adjustable setting	29 (109.8)
ELECTRICAL RATING	120V, 60 Hz
Export model	220 – 240V, 50 Hz
BREAKER/FUSE REQUIREMENTS	
Domestic model — amps	15
Export model — amps	10
CYLINDER	
Volume — cu. ft. (liters)	2 1/2 (70.8)
Diameter — in. (cm)	20 1/2 (52.1)
Depth — in. (cm)	15 (38.1)
DOOR OPENING	
In. (cm)	16 (40.6)
EXTRACT SPEED	
Maximum rpm	618
Maximum g-force	110
OPERATING PRESSURE	
Psi (bar)	15 – 120 (1 – 8)
INLET HOSE LENGTH	
Ft. (m)	4 (1.22)
DRAIN HOSE LENGTH	
Ft. (m)	4 (1.22)
ADJUSTABLE LEVELING LEGS	•
COLORS	
White	•
Bisque	•
APPROXIMATE WEIGHT — lbs. (kg)	
Crated	224 (102)
Uncrated	198 (90)

*Average based on testing with a 14-pound AHAM load.

Flush-to-wall installation is permitted by a 1/4" (3.2 cm) back panel overhang.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.



NEW YORK CITY
M.E.A.

